

MPB SERIES CV300 FLOW CONTROL VALVE

GENERAL INFORMATION

The MPB Series CV300 Flow Control Valve offers excellent corrosion resistance and is ideal for use with MPB Series 1750, 1750A, 3000, 3000A Flowmeters and the TX175 Flow Transmitter.

The MPB range of flow control valves offers excellent, economical, independent flow control, which can be used in any application where a needle flow control valve is required.



MPB SERIES CV300 FEATURES


- OFFERS INDEPENDENT FLOW CONTROL VALVE FOR MPB FLOWMETERS
- MANUFACTURED IN STAINLESS STEEL, OR PVC
- GOOD FLOW CHARACTERISTICS
- IDEAL FOR ANY APPLICATION REQUIRING AN INDEPENDENT FLOW CONTROL VALVE
- CONTROLS LIQUID FLOW RATES UP TO 80 L/MIN
- CONTROLS AIR FLOW RATES UP TO 2000 L/MIN @ 10 BAR G
- SUITABLE FOR AIR AND LIQUID FLOWS
- EXCELLENT CORROSION RESISTANCE
- ECONOMICALLY PRICED

MPB SERIES CV300 FLOW CONTROL VALVE

<p>Process Connections: Inlet 1" BSPPF Outlet 1" BSPPM</p> <p>Materials of Construction: Body: PVC, or Stainless steel Spindle: Stainless steel Seals: Viton</p>	<p>Weight: PVC: 100g Stainless steel: 500g</p> <p>Maximum Temperature: PVC: 60°C Stainless Steel: 100°C</p> <p>Maximum Pressure: PVC: 7 bar g Stainless Steel: 30 bar g</p>
---	--

FLOW RATE H ₂ O	=	INLET PRESSURE
40 L/min	=	1 bar g
60 L/min	=	2 bar g
70 L/min	=	3 bar g
80 L/min	=	4 bar g

Note – above data using valve set at 4 full turns

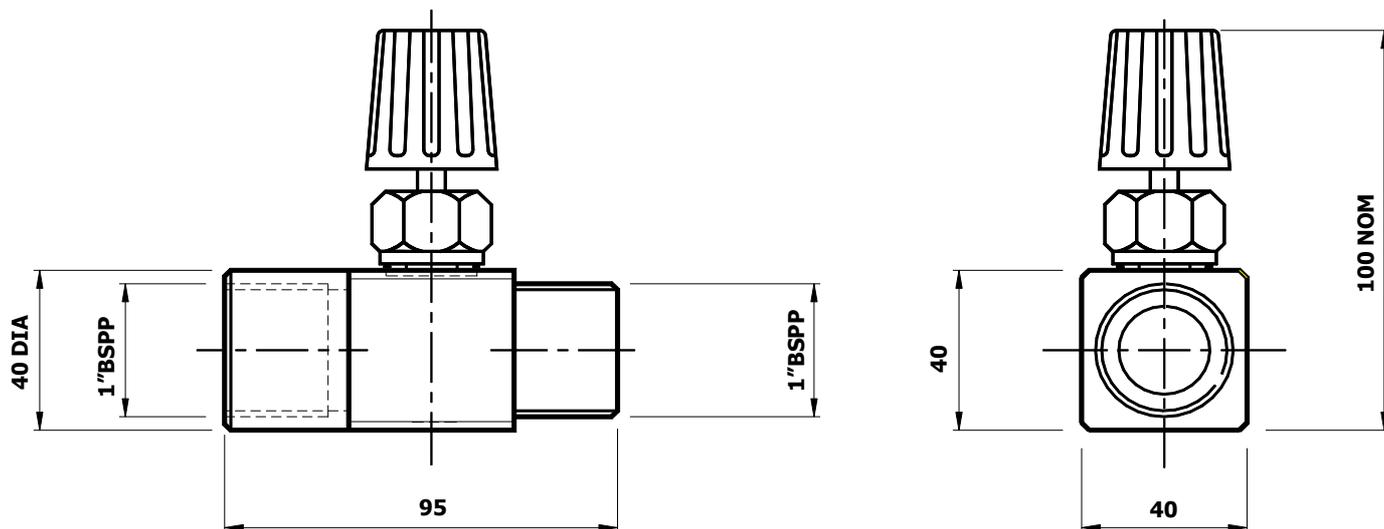

MPB Industries Ltd - Designers and Manufacturers of Scientific and Process Control Instrumentation

Part of the Scientific Digital Imaging plc (SDI) group of companies
 Unit 1 Branbridges Ind Est, East Peckham, Kent TN12 5HF, UK, Tel: +44 (0)1622 872401
 mail@mpbflowmeters.com, www.mpbflowmeters.com



Due to the constant development and improvement of products, information may be altered or withdrawn without notice.