

MPB SERIES CP130S CALIBRATION CYLINDER

GENERAL INFORMATION

This range of precision Stainless steel calibration cylinders have been designed to meet the requirements of high accuracy and robust construction where metering large capacity outputs is essential.

This product range can be supplied with either flanged, or threaded connections and secure welded mounting brackets.

Ideal for use as a pump setting gauge, or pump flow rate monitoring.

Materials of construction are 316 Stainless steel in conjunction with a polycarbonate (or borosilicate glass) fully protected sight glass.


MPB Series CP130S Calibration Cylinders conform to the 2014/68/EU Pressure Equipment Directive. The category of SEP applies, this is based on the process fluid being a Group 1 liquid with a vapour pressure of less than 0.5 bar and a cylinder volume of less than 200 bar litre.

Cylinders can also be manufactured to suit customer requirements regarding materials of construction.



MPB SERIES CP130S FEATURES


- HIGH CALIBRATION CAPACITY UP TO 50 LITRES
- STANDARD CAPACITIES 10, 15, 20, 25, 30 AND 50 LITRES
- EASY TO READ
- CALIBRATED SCALES WITH TRACEABLE CERTIFICATES
- SPECIAL SCALES 'DOWN READ' TO CUSTOMER SPECIFICATION IF REQUIRED
- THREADED, OR FLANGED CONNECTIONS
- PUMP SETTING GAUGE
- PUMP RATE CHECKING
- CALIBRATION TUBE EASILY REMOVED IN SITU FOR CLEANING
- CERTIFIED HYDROSTATIC TEST CERTIFICATES AVAILABLE

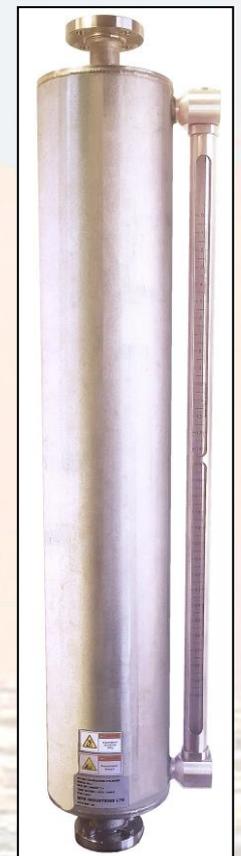

MPB SERIES CP130S CALIBRATION CYLINDER

<p>End Connections: 316 Stainless steel Threaded, or flanged to ANSI B 16.5</p> <p>Cylinder: 316 Stainless steel, certified EN10204 3.1. All welded construction (fully certified)</p> <p>Material Specification: To customer requirement. Fully certified where requested to EN10204 3.1</p>	<p>Accuracy: ± 2% of actual reading</p> <p>Seals: Nitrile, Viton, EPDM, etc</p> <p>Maximum Working Pressure: See table below</p> <p>Maximum Working Temperature: -10°C / +100°C</p>
--	---

CAPACITY (Litres)	S.M.W.P	DIM A	DIM B	DIM C	DIM D	DIM E	DIM F
10	11.5 bar g	960	167	100	70	829	784
15	7.5 bar g	880	219	128	70	783	738
20	6 bar g	1060	219	128	105	928	878
25	5 bar g	1245	219	128	105	1095	1045
30	4.5 bar g	1400	219	128	105	1270	1220
50	2.5 bar g	1210	324	180	105	1050	1000

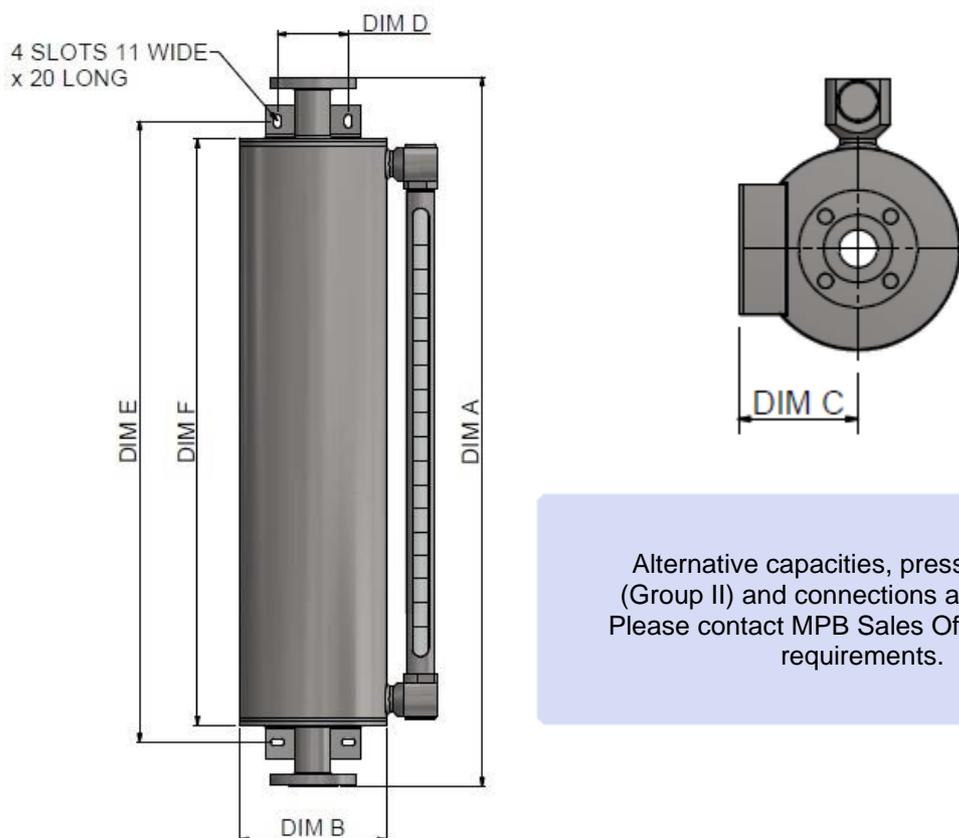

Alternative capacities, pressure ratings
(Group II) and connections are available.
Please contact MPB Sales Office with your
requirements.

MPB Industries Ltd - Designers and Manufacturers of Scientific and Process Control Instrumentation

Part of the Scientific Digital Imaging plc (SDI) group of companies
Unit 1 Branbridges Ind Est, East Peckham, Kent TN12 5HF, UK, Tel: +44 (0)1622 872401
mail@mpbflowmeters.com, www.mpbflowmeters.com



Due to the constant development and improvement of products, information may be altered or withdrawn without notice.