

Product Data Sheet



MPB SERIES SL105SV SIGHT LEVEL INDICATOR

GENERAL INFORMATION

MPB manufacture a wide range of process control instrumentation, which includes flowmeters, flow alarms, flow switches, flow transmitters, level switches, level indicators, calibration cylinders and custom built instrumentation.

The MPB Series SL105SV is a custom designed tank level indicator where an instant indication of level is required. A ball check safety valve and independent isolation valve are also included, which allow for the easy removal and cleaning of the sight glass.

The complete instrument is manufactured in stainless steel with a glass or polycarbonate sight tube and safety cover.

SERIES SL105SV FEATURES

- LENGTHS AVAILABLE UP TO 1 METRE
- CONNECTIONS REAR FACING ½" BSPTF (Rc ½)
- EASY IN SITU TUBE REMOVAL
- SUITABLE FOR AGGRESSIVE FLUIDS
- STAINLESS STEEL CONSTRUCTION AND CONNECTIONS AS STANDARD GIVING EXCELLENT ALL WEATHER PROTECTION
- POLYCARBONATE SAFETY COVER
- INCORPORATES BALL CHECK SAFETY VALVE
- THE SL105SV IS SUPPLIED WITH AN INDEPENDENT SIGHT TUBE ISOLATION VALVE FOR EASY REMOVAL AND CLEANING
- OTHER MATERIALS AVAILABLE PLEASE CONTACT MPB SALES OFFICE
- STANDARD CENTRES 300mm, 400mm, 500mm, 600mm, 800mm, AND 1000mm
- COVER WIDTH 50mm



MPBTB 090 Iss 6 Page 1 of 2

MPB SERIES SL105SV SIGHT LEVEL INDICATOR

SPECIFICATION

The MPB SL105SV is a custom-built sight level indicator, which can be manufactured in a variety of lengths in stainless steel offering a wide range of process fluids and vessel sizes up to 1 metre centres and incorporating a polycarbonate safety cover.

Typical materials of construction are as follows:-

Chassis: 316 Stainless steel

Process Connections: 303 Stainless steel as standard, alternatives available

Process Centres: (See table below)

Connection Type: ½" BSPTF (Rc ½), NPT or flanged also available

Tube: Clear polycarbonate or borosilicate glass

Seals: Viton/Nitrile depending on process fluid and temperature

Cover: 4mm clear polycarbonate

Temperature Rating: 100°C maximum (dependent on specification)


Pressure Rating: Normally atmospheric


ACCESSORIES

Scale Plate: Calibrated to suit

Mounting Brackets: Available upon request

PRODUCT	PROCESS	OVERALL
CODE	CENTRES	LENGTH
SLM3V	300	325
SLM4V	400	425
SLM5V	500	525
SLM6V	600	625
SLM8V	800	825
SLM10V	1000	1025



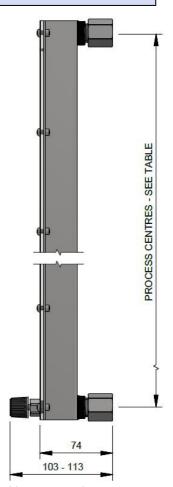

For additional information on the Sight Level Indicator or any of our flowmeter products,

MPB Industries Ltd - Designers and Manufacturers of Scientific and Process Control Instrumentation

Part of the Scientific Digital Imaging plc (SDI) group of companies
Unit 1 Branbridges Ind Est, East Peckham, Kent TN12 5HF, UK, Tel: +44 (0)1622 872401
mail@mpbflowmeters.com, www.mpbflowmeters.com

SDIGROUP

Due to the constant development and improvement of products, information may be altered or withdrawn without notice.

MPBTB 090 Iss 6 Page 2 of 2